

SOFF-CUT® SAWS AND BLADES



HUSQVARNA SOFF-CUT® 150

Ultra-early concrete cutting system to reduce random cracking. Designed for residential and commercial applications.

- Gas saw with easy pull start engine.
- Mechanical blade depth control.
- Non-marking and non-stick polyurethane wheels.
- Retractable front guide system.
- Integrated weight block maintains proper weight balance for consistent cut.
- 6" blade capacity.

25-X150 Soff-Cut® 150 Prowler



HUSQVARNA SOFF-CUT® 150D

Ultra-early concrete cutting system to reduce random cracking. Designed especially for the contractor who wants a no-hassle way to make decorative cuts.

- 4-1/2 HP gas saw with easy pull start engine.
- Mechanical blade depth control.
- Non-marking and non-stick polyurethane wheels.
- Self-aligning guide wheels guarantee proper blade alignment with the saw joint every time.
- Integrated weight block maintains proper weight balance for consistent cut.
- 6" blade capacity.

25-X150D Soff-Cut® 150D Prowler

SOFF-CUT® FROM HUSQVARNA

*Ultra early entry cutting diamond designed for use in the
Green Zone™.*

HUSQVARNA SOFF-CUT® FLX SERIES

Soff-Cut® is the only ultra-early entry dry-cutting system that controls random cracking. The Soff-Cut® blade and spring-loaded skid plate keep pressure applied to the concrete surface, insuring a smooth cut. The FLX diamond blades are color-coded for proper selection in your specific aggregate conditions. They are designed to work specifically with the Soff-Cut® system. A patented anti-ravel skid plate is included with every FLX blade to allow for same day cutting.




SOFF-CUT® ULTRA EARLY ENTRY FLX4000 ORANGE SERIES

The Soff-Cut® FLX4000 Orange Series is recommended for medium aggregate/medium abrasive sand.

25-FLX6-4000	6" Blade and Skid Plate	25-FLX12-4000	12" Blade and Skid Plate
25-FLX8-4000	8" Blade and Skid Plate	25-FLX14-4000	14" Blade and Skid Plate
25-FLX10-4000	10" Blade and Skid Plate		

****Blade break in tip:** When using a new diamond blade for the first time, operate the saw at half the normal forward speed for 100 feet. This will allow the blade to “open up” and remain cool, promoting faster cutting and full blade life.

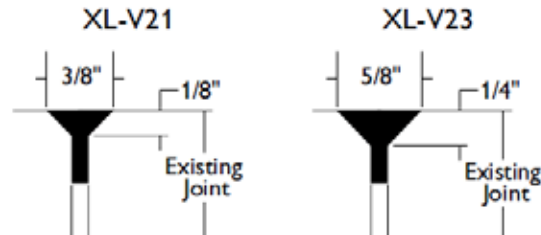

SOFF-CUT® PROEDGE SERIES DIAMOND BLADES

ProEdge diamond blades are used to chase existing cuts for an attractive, beveled finish. Bevel cuts should be made the day following the initial control joint.

25-XL6-V21	6" x .375" V
25-XL6-V23	6" x .625" V

SOFF-CUT® 4" SCORING BLADE

Use the Soff-Cut® 4" Scoring Blade to cut shallow scoring cuts that don't require full depth structural cuts. Save the useful life of your standard Soff-Cut® blade by using the 4" scoring blade for 1/2" decorative cuts.

25-XL4	4" Soff-Cut® Scoring Blade
--------	----------------------------